


DETERMINING THE REDUCTION OF TRANSMITTED IMPACT NOISE BY FLOOR COVERINGS ACCORDING TO ISO 10140-3:2010



principal: Unifloor Underlay Systems

| Variant | Underlayer (described from the laboratory floor) | | Topfloor |
|---------|--|-------------|----------|
| 11 | PE-Foil | Soundkiller | Duoplank |

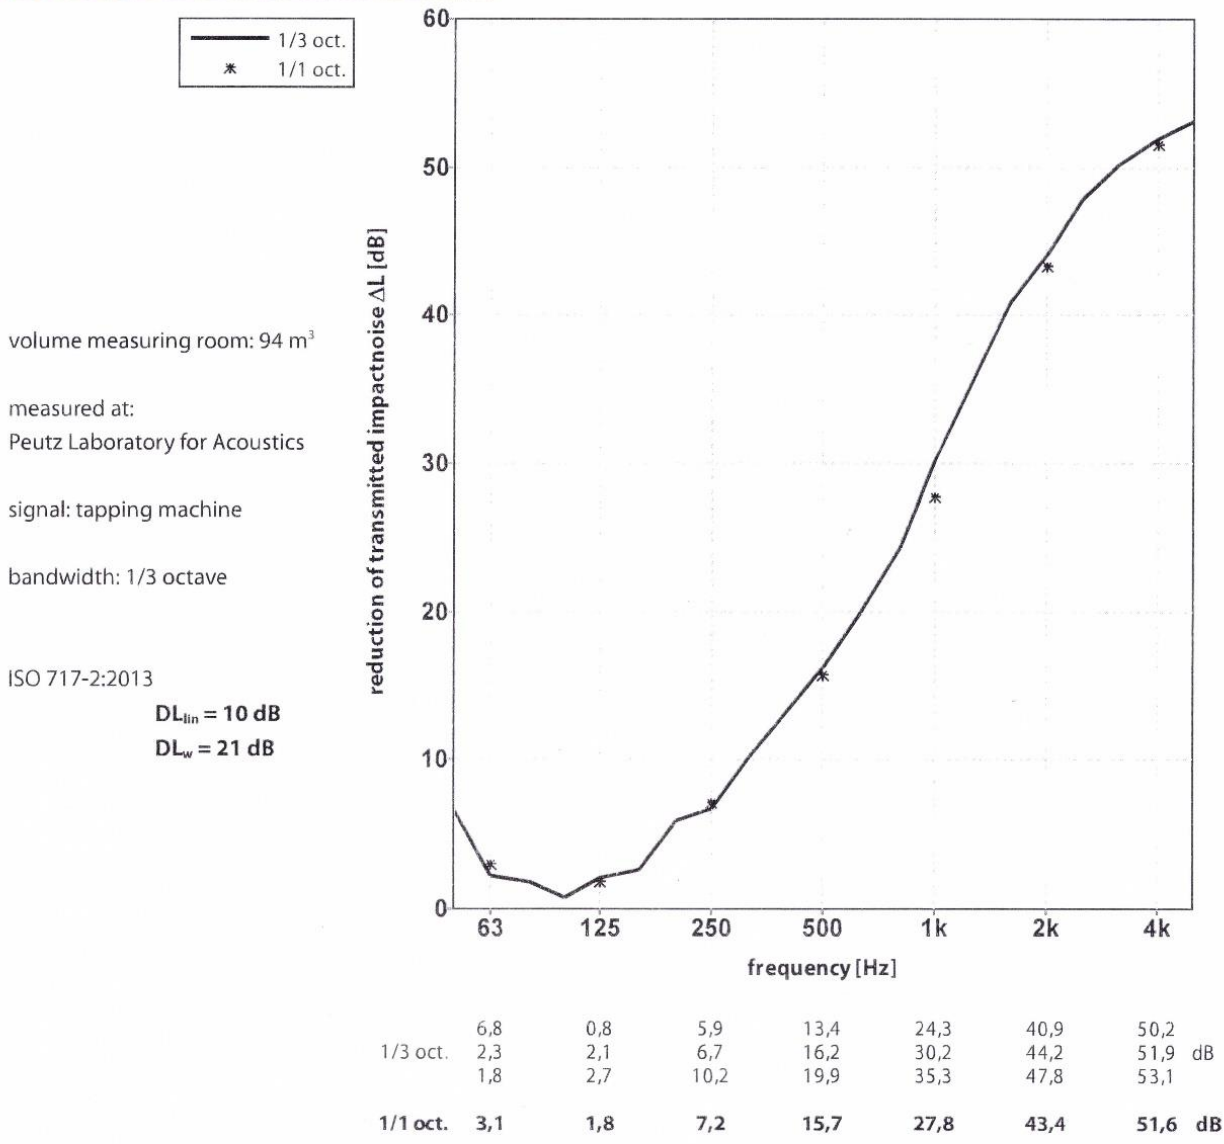

volume measuring room: 94 m³

measured at:
 Peutz Laboratory for Acoustics

signal: tapping machine

bandwidth: 1/3 octave

ISO 717-2:2013

Insulat versie 3.18 mode 11. PM: JK. file: a3085 L0#:208 L1#:294 #:#:295

publication is permitted for the entire page only

Mook, 26-05-2016